



NEXT



POWERLOC® CABLELOC™

BUILT TO STAND THE TEST OF TIME


ELECTRICAL PIPES

POWERLOC®

Next Polymers' POWERLOC® DB2/ES2 conduit is specifically designed for direct burial or encasement in concrete or masonry, in compliance with the Canadian Electrical Code, Part I, for ordinary locations. It supports a maximum continuous operating temperature of 75 °C. Its smooth interior surface facilitates cable pulling while preventing costly cable damage. POWERLOC® offers exceptional tensile and impact strength, even in cold weather conditions.

APPLICATIONS

- Utilities
- Telecom
- Communications
- Cable
- Hospitals / Medical complexes
- Commercial buildings

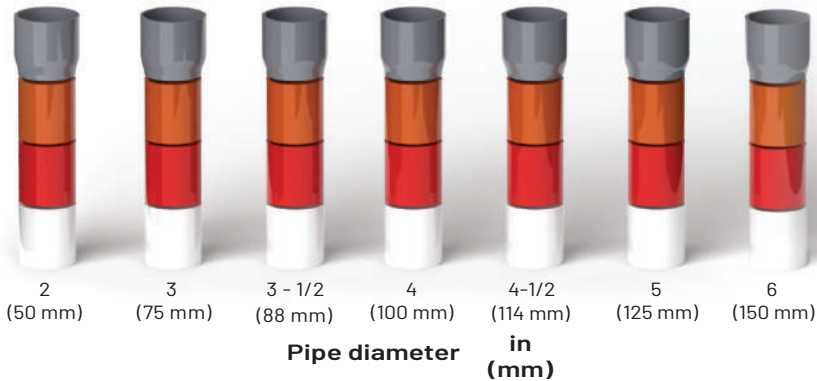

CERTIFIED TO:



C22.2 No. 211.1

CABLELOC™

Next Polymers' CABLELOC™ conduit is specifically designed for the installation of wires and cables, supporting a continuous operating temperature of 75 °C, in compliance with the Canadian Electrical Code, Part I, for ordinary locations. Its smooth interior surface facilitates cable pulling and prevents costly cable damage. CABLELOC™ is highly UV-resistant and offers excellent tensile and impact strength, even in cold weather conditions.

APPLICATIONS

CERTIFIED TO:



C22.2 No. 211.2

CONFORMS TO:




651




TC 2

Utilities, cable, communications, residential, airports, subways, bridges & tunnels, mines, marinas, water/sewage treatment plants, pulp & paper industries, street & highway lighting, food processing plants, agricultural, parking garages, car washes, fish plants, steel mills.

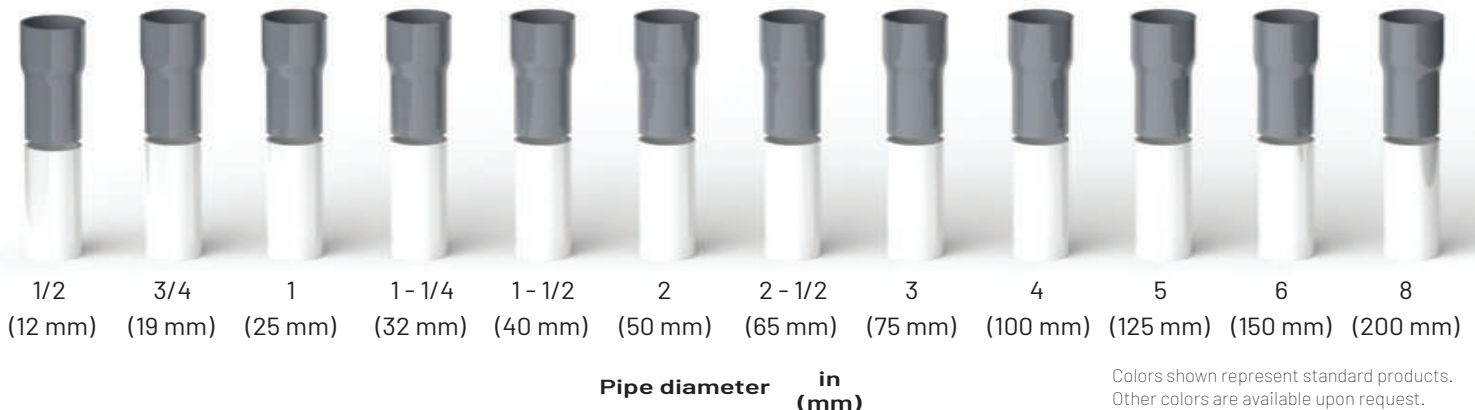

Colors shown represent standard products.
Other colors are available upon request.

RETHINKING POWER MANAGEMENT



☎ 561-842-2743
863-357-3300

✉ info@nextinfras.com

🌐 nextinfras.ca

NEXT 