


SDD3 1500	
MAX. FLOW RATE	2.8 cfs
SEDIMENT STORAGE CAPACITY	58.0 ft³
OIL STORAGE CAPACITY	148 gal

MINIMUM ANGLE PER MODEL			
 Min. angle	SDD3™ MODEL	PIPE Ø In.	MINIMUM <
	1500	12	90°
		18	105°
		30	140°

- GENERAL NOTES:**
- STANDARD REFERENCE DRAWING. FOR SPECIFIC PROJECT DRAWINGS, PLEASE CONTACT NEXT STORM TECHNICAL DEPARTMENT.
 - DESIGN AND DIMENSIONAL TOLERANCES ACCORDING TO LOCAL REGULATIONS
 - STANDARD HEIGHTS. OTHER OPTIONS AVAILABLE ON REQUEST
 - CONFIGURATION: ON-LINE / OFF-LINE EXTERNAL REINFORCED CONCRETE STRUCTURE
 - SHOULD SUPPORT A CL-625, H-25, AND HS-20 LOAD
 - THIS PRODUCT IS PROTECTED BY THE US 16/901,238 PATENT OTHER PATENTS PENDING
- SPECIFIC NOTES SDD3 1500 MODEL**
- MAX. DIAMETER OF PIPES: Ø30 in. OTHER DIAMETERS AVAILABLE ON REQUEST

PROJECT DATA

MODEL : SDD3 1500

IDENTIFICATION OF THE STRUCTURE :

QUALITY FLOW (GPM):

PEAK FLOW (GPM):

PIPE	TYPE	DIAMETER (in)	INVERT (ft)	ANGLE
INLET 1				
INLET 2				
OUTLET				

GRADE/RIM ELEVATION (ft)




NOTES:

SDD3™ 1500

NEXT

info@nextinfrs.com
www.nextinfrs.com

1305 Hill Ave.
West Palm Beach, FL 33407

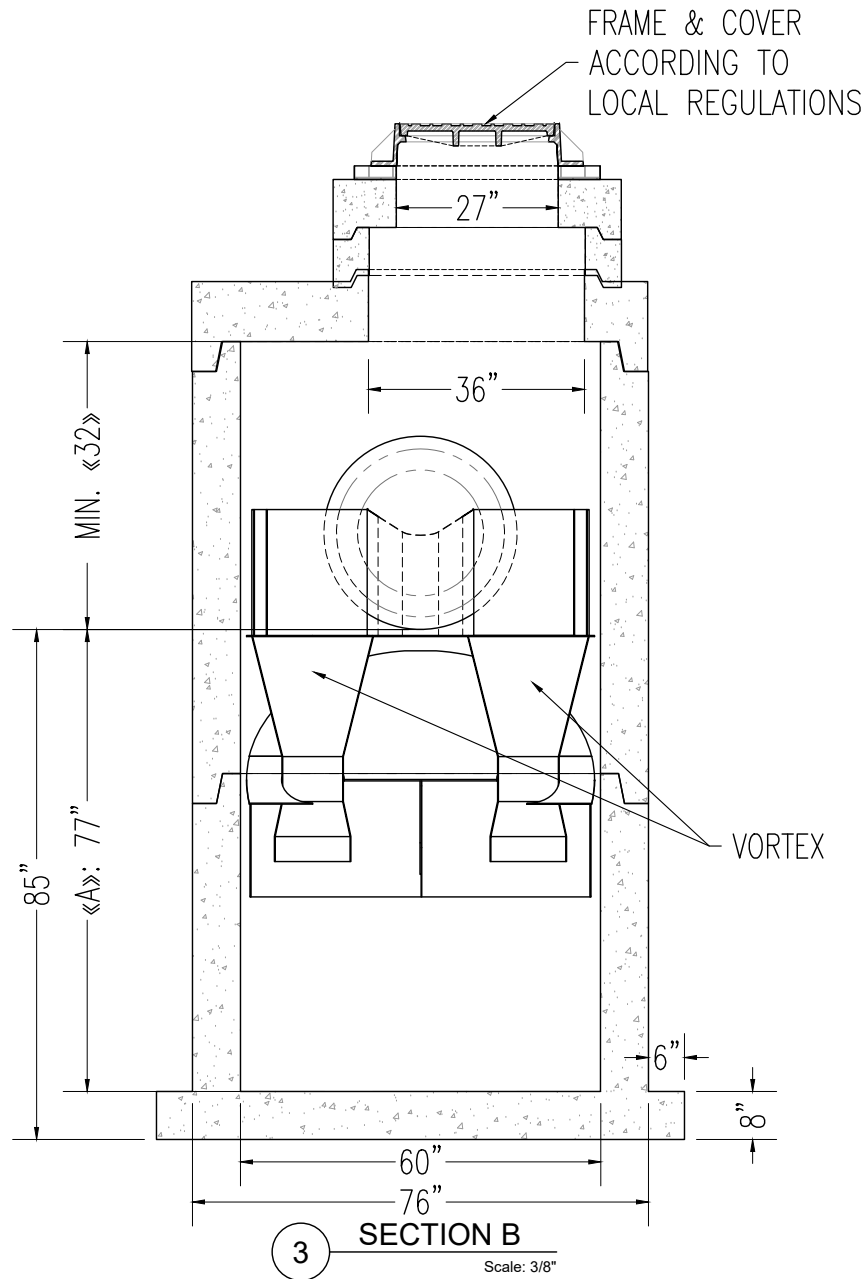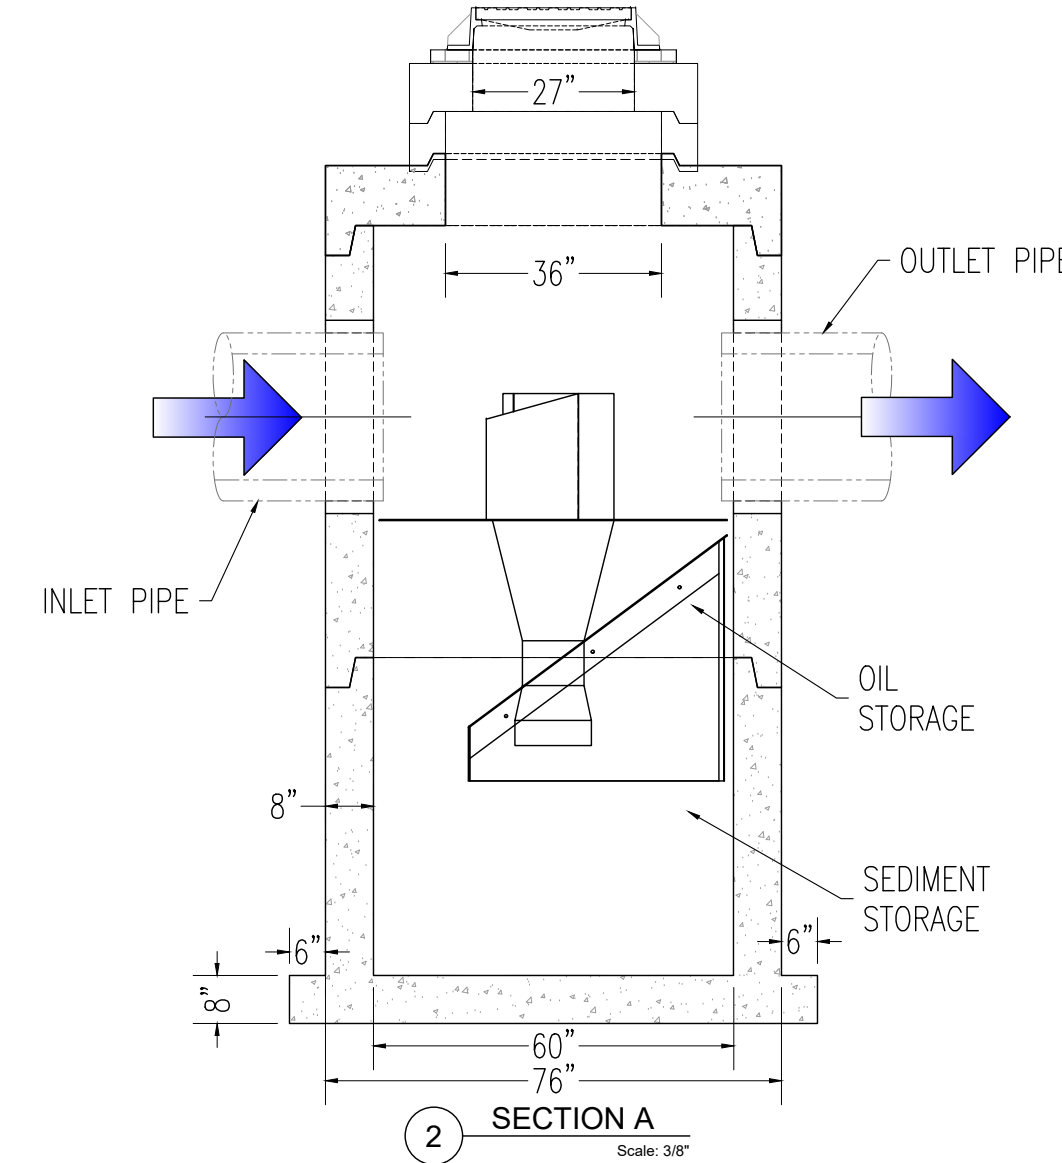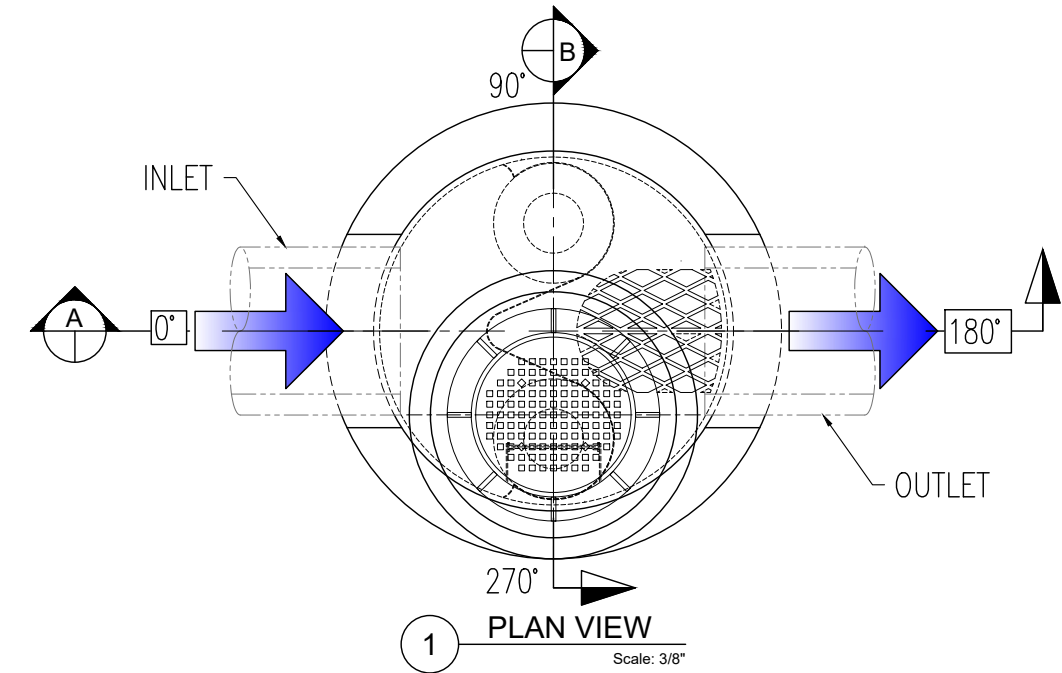

INVERT INLET AND INVERT OUTLET
MAY BE AT THE SAME ELEVATION