
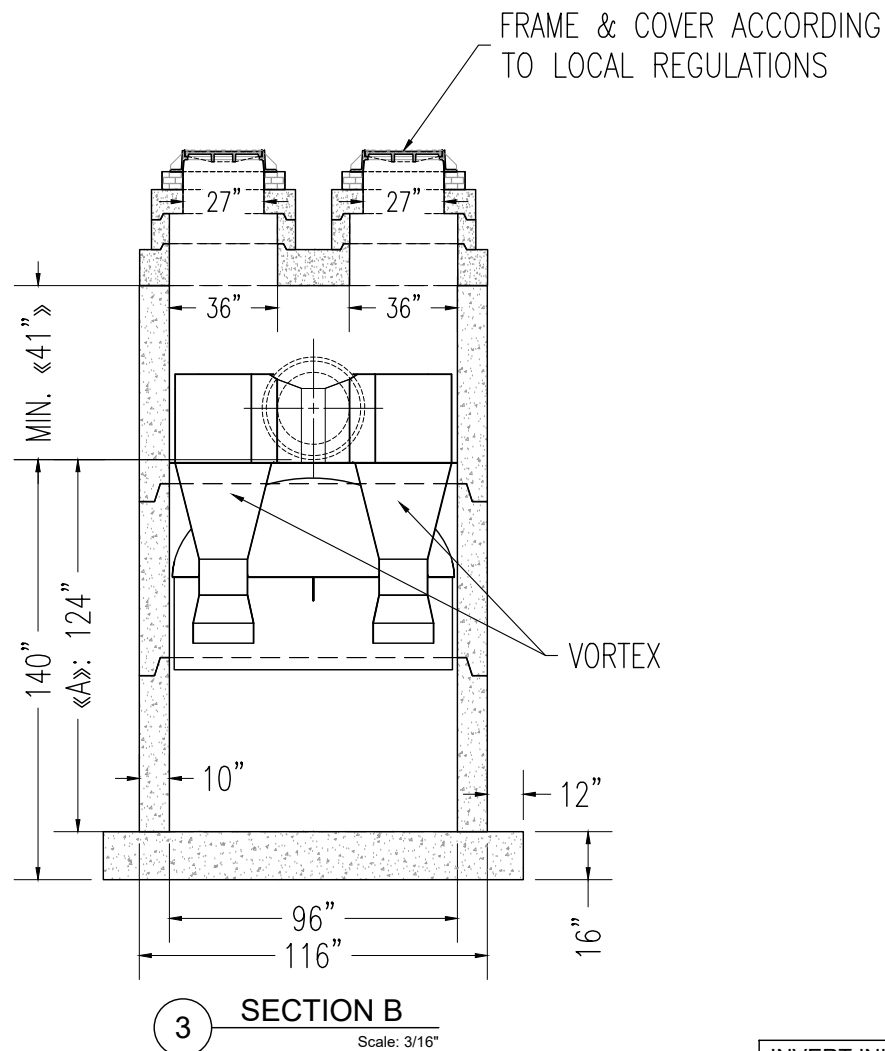
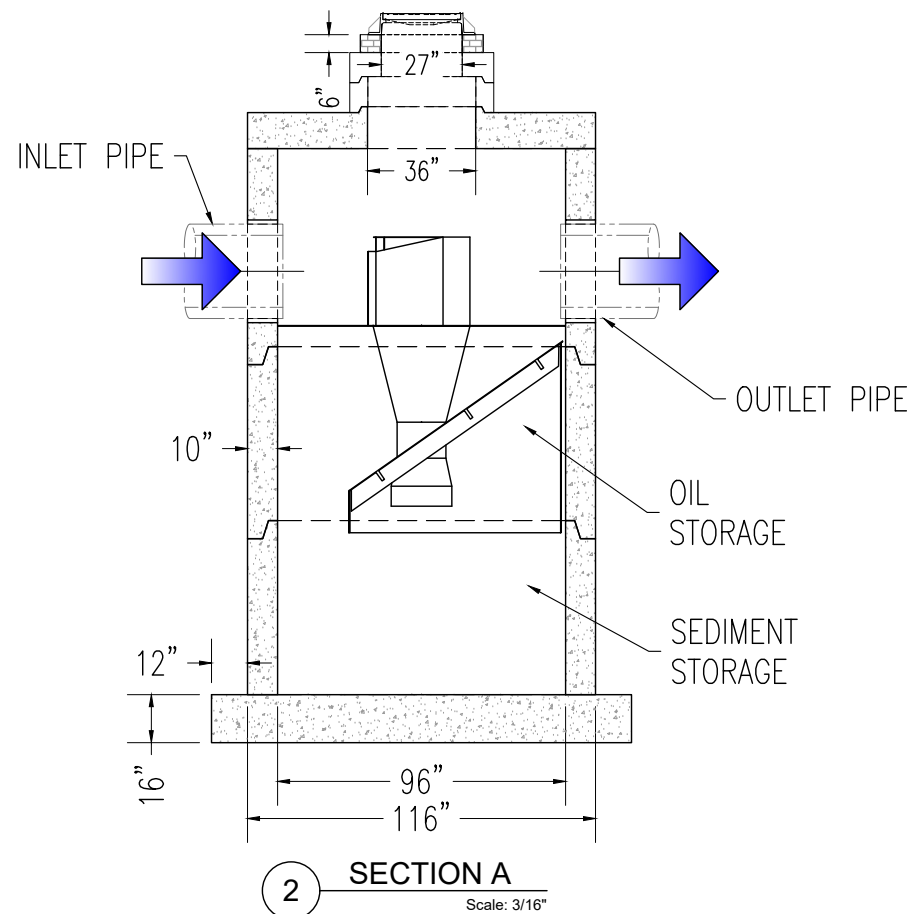
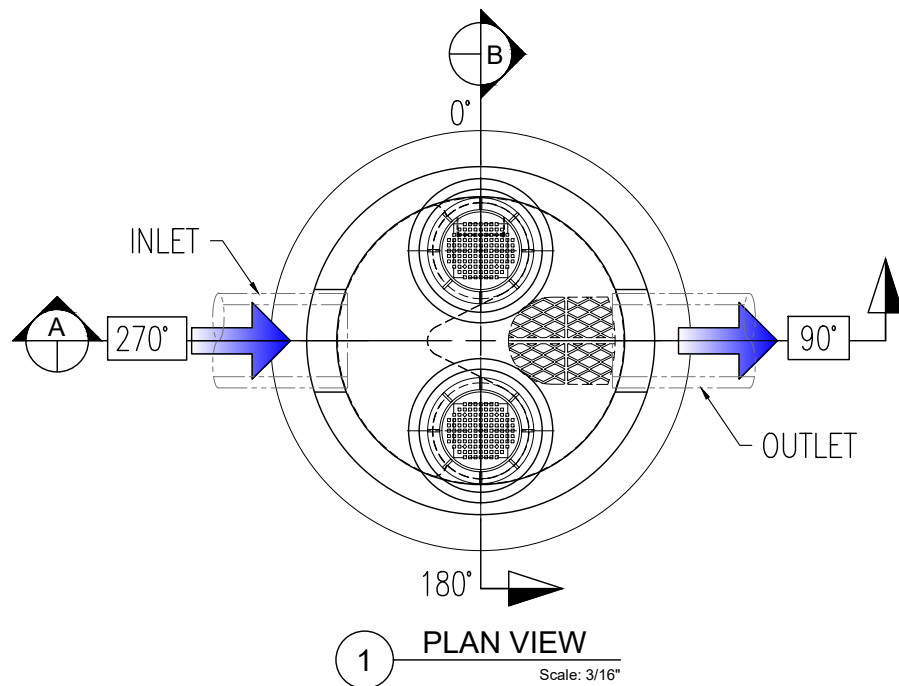




SDD3 2400	
MAX. FLOW RATE	7.2 cfs
SEDIMENT STORAGE CAPACITY	231.0 ft³
OIL STORAGE CAPACITY	616 gal

MINIMUM ANGLE PER MODEL			
 Min. angle	SDD3™ MODEL	PIPE Ø In.	MINIMUM <
	2400	18	70°
		30	90°
		42	110°

INVERT INLET AND INVERT OUTLET
MAY BE AT THE SAME ELEVATION

- GENERAL NOTES:**
- STANDARD REFERENCE DRAWING. FOR SPECIFIC PROJECT DRAWINGS, PLEASE CONTACT NEXT STORM TECHNICAL DEPARTMENT.
 - DESIGN AND DIMENSIONAL TOLERANCES ACCORDING TO LOCAL REGULATIONS
 - STANDARD HEIGHTS. OTHER OPTIONS AVAILABLE ON REQUEST
 - CONFIGURATION: ON-LINE / OFF-LINE EXTERNAL REINFORCED CONCRETE STRUCTURE
 - SHOULD SUPPORT A CL-625, H-25, AND HS-20 LOAD
 - THIS PRODUCT IS PROTECTED BY THE US 16/901,238 PATENT OTHER PATENTS PENDING
- SPECIFIC NOTES SDD3 2400 MODEL**
- MAX. DIAMETER OF PIPES: Ø42 in. OTHER DIAMETERS AVAILABLE ON REQUEST

PROJECT DATA	
MODEL :	SDD3 2400
IDENTIFICATION OF THE STRUCTURE :	
QUALITY FLOW (GPM):	
PEAK FLOW (GPM):	

PIPE	TYPE	DIAMETER (in)	INVERT (ft)	ANGLE
INLET 1				
INLET 2				
OUTLET				

GRADE/RIM ELEVATION (ft)

NOTES:

SDD3™ 2400

NEXT

info@nextinfrass.com
www.nextinfrass.com

1305 Hill Ave.
West Palm Beach, FL 33407