

NEXT




DURALOC®

BUILT TO STAND THE TEST OF TIME



SEWER PIPES

DURALOC®

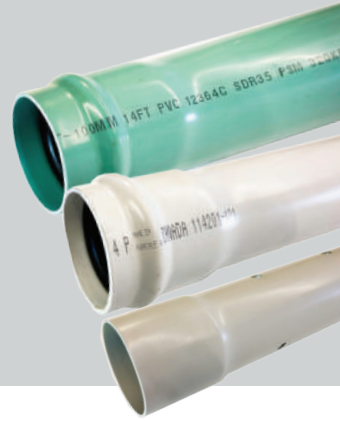

DURALOC® pipe is manufactured using a high-strength, high-impact PVC compound, providing enhanced protection against cracking, leaking, corrosion, and other threats to ensure long-lasting infrastructure. Resistant to H₂S and other aggressive chemicals commonly found in sanitary sewage, this pipe maintains its integrity over time. With a Manning coefficient of 0.009, it allows for the use of smaller diameters compared to other materials, without compromising performance.

APPLICATIONS

- Sanitary sewer
- Storm sewer
- Industrial effluent

CERTIFIED TO:



B182.2
DR 28 and DR 35 series



BNO 3624-130
4" and 6" DR 35 and all diameters of DR 28 series
BNO 3624-135
8" to 18" DR 35 and all diameters of DR 26 series

CONFORMS TO:



D3034




M278



Standard Dimension Ratio (SDR)

Colors shown represent standard products.
Other colors are available upon request.

RETHINKING WATER MANAGEMENT



☎ 561-842-2743
863-357-3300
✉ info@nextinfras.com
🌐 nextinfras.ca

NEXT  